

RADIATION PATTERNS

The radiation pattern is a graphical depiction of the relative field strength transmitted from or received by the antenna. Antenna radiation patterns are taken at one frequency, one polarization, and one plane cut. The patterns are usually presented in polar or rectilinear form with a dB strength scale. Patterns are normalized to the maximum graph value, 0 dB, and a directivity is given for the antenna. This means that if the side lobe level from the radiation pattern were down -13 dB, and the directivity of the antenna was 4 dB, then the sidelobe gain would be -9 dB.

Figures 1 to 14 on the pages following depict various antenna types and their associated characteristics. The patterns depicted are those which most closely match the purpose for which the given shape was intended. In other words, the radiation pattern can change dramatically depending upon frequency, and the wavelength to antenna characteristic length ratio. See section 3-4. Antennas are designed for a particular frequency. Usually the characteristic length is a multiple of $\lambda/2$ minus 2-15% depending on specific antenna characteristics.

The gain is assumed to mean directional gain of the antenna compared to an isotropic radiator transmitting to or receiving from all directions.

The half-power (-3 dB) beamwidth is a measure of the directivity of the antenna.

Polarization, which is the direction of the electric (not magnetic) field of an antenna is another important antenna characteristic. This may be a consideration for optimizing reception or jamming.

The bandwidth is a measure of how much the frequency can be varied while still obtaining an acceptable VSWR (2:1 or less) and minimizing losses in unwanted directions. See Glossary, Section 10.

A 2:1 VSWR corresponds to a 9.5dB (or 10%) return loss - see Section 6-2.

Two methods for computing antenna bandwidth are used:


Narrowband by %, $B = \left(\frac{F_U - F_L}{F_C} \right) (100)$, where F_C = Center frequency

Broadband by ratio, $B = \frac{F_U}{F_L}$

An antenna is considered broadband if $F_U / F_L > 2$. The table at the right shows the equivalency of the two, however the shaded values are not normally used because of the aforementioned difference in broadband/narrowband.

Bandwidth	
%	Ratio
5	1.05 : 1
10	1.11 : 1
20	1.22 : 1
30	1.35 : 1
40	1.50 : 1
50	1.67 : 1
60	1.85 : 1
67	2 : 1
100	3 : 1
120	4 : 1
133	5 : 1
150	7 : 1
160	9 : 1
163	10 : 1

For an object that experiences a plane wave, the resonant mode is achieved when the dimension of the object is $n\lambda/2$, where n is an integer. Therefore, one can treat the apertures shown in the figure below as half wave length dipole antennas for receiving and reflecting signals. More details are contained in section 8-4.

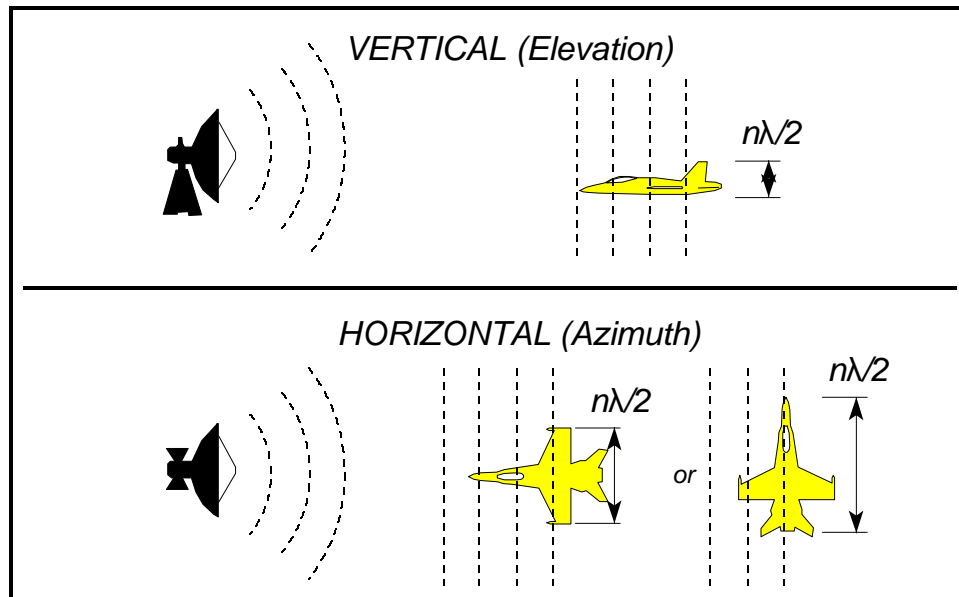

The following lists antenna types by page number. The referenced page shows frequency limits, polarizations, etc.

Type	Page	Type	Page
4 arm conical spiral	3-3.6	log periodic	3-3.8
alford loop	3-3.4	loop, circular	3-3.4
aperture synthesis	3-3.8	loop, alfred	3-3.4
array	3-3.8	loop, square	3-3.4
axial mode helix	3-3.5	luneberg lens	3-3.9
biconical w/polarizer	3-3.6	microstrip patch	3-3.9
biconical	3-3.6	monopole	3-3.3
cavity backed circuit fed slot	3-3.9	normal mode helix	3-3.5
cavity backed spiral	3-3.5	parabolic	3-3.7
circular loop	3-3.4	patch	3-3.9
conical spiral	3-3.5	reflector	3-3.9
corner reflector	3-3.9	rhombic	3-3.3
dipole array, linear	3-3.8	sinuous, dual polarized	3-3.6
dipole	3-3.3	slot, guide fed	3-3.9
discone	3-3.4	slot, cavity backed	3-3.9
dual polarized sinuous	3-3.6	spiral, 4 arm conical	3-3.6
guide fed slot	3-3.9	spiral, conical	3-3.5
helix, normal mode	3-3.5	spiral, cavity backed	3-3.5
helix, axial mode	3-3.5	square loop	3-3.4
horn	3-3.7	vee	3-3.3
linear dipole array	3-3.8	yagi	3-3.8




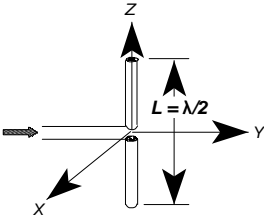


Antenna Type	Radiation Pattern	Characteristics
MONOPOLE 	<p>Elevation:</p>  <p>Azimuth:</p> 	<p>Polarization: Linear Vertical as shown</p> <p>Typical Half-Power Beamwidth 45 deg x 360 deg</p> <p>Typical Gain: 2-6 dB at best</p> <p>Bandwidth: 10% or 1:1:1</p> <p>Frequency Limit Lower: None Upper: None</p> <p>Remarks: Polarization changes to horizontal if rotated to horizontal</p>
$\lambda/2$ DIPOLE 	<p>Elevation:</p>  <p>Azimuth:</p> 	<p>Polarization: Linear Vertical as shown</p> <p>Typical Half-Power Beamwidth 80 deg x 360 deg</p> <p>Typical Gain: 2 dB</p> <p>Bandwidth: 10% or 1:1:1</p> <p>Frequency Limit Lower: None Upper: 8 GHz (practical limit)</p> <p>Remarks: Pattern and lobing changes significantly with L/f. Used as a gain reference < 2 GHz.</p>

Figure 1





Antenna Type	Radiation Pattern	Characteristics
VEE 	<p>Elevation & Azimuth:</p> 	<p>Polarization: Linear Vertical as shown</p> <p>Typical Half-Power Beamwidth 60 deg x 60 deg</p> <p>Typical Gain: 2 to 7 dB</p> <p>Bandwidth: "Broadband"</p> <p>Frequency Limit Lower: 3 MHz Upper: 500 MHz (practical limits)</p> <p>Remarks: 24KHz versions are known to exist. Terminations may be used to reduce backlobes.</p>
RHOMBIC 	<p>Elevation & Azimuth:</p> 	<p>Polarization: Linear Vertical as shown</p> <p>Typical Half-Power Beamwidth 60 deg x 60 deg</p> <p>Typical Gain: 3 dB</p> <p>Bandwidth: "Broadband"</p> <p>Frequency Limit Lower: 3 MHz Upper: 500 MHz</p> <p>Remarks: Termination resistance used to reduce backlobes.</p>

Figure 2




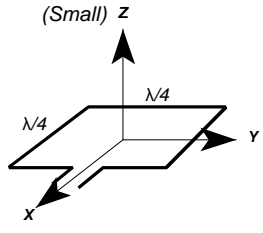


Antenna Type	Radiation Pattern	Characteristics
<p>CIRCULAR LOOP (Small)</p> 	<p>Elevation:</p>  <p>Azimuth:</p> 	<p>Polarization: Linear Horizontal as shown</p> <p>Typical Half-Power Beamwidth: 80 deg x 360 deg</p> <p>Typical Gain: -2 to 2 dB</p> <p>Bandwidth: 10% or 1.1:1</p> <p>Frequency Limit: Lower: 50 MHz Upper: 1 GHz</p>
<p>SQUARE LOOP (Small)</p> 	<p>Elevation:</p>  <p>Azimuth:</p> 	<p>Polarization: Linear Horizontal as shown</p> <p>Typical Half-Power Beamwidth: 100 deg x 360 deg</p> <p>Typical Gain: 1-3 dB</p> <p>Bandwidth: 10% or 1.1:1</p> <p>Frequency Limit: Lower: 50 MHz Upper: 1 GHz</p>

Figure 3







Antenna Type	Radiation Pattern	Characteristics
<p>DISCONE</p> 	<p>Elevation:</p>  <p>Azimuth:</p> 	<p>Polarization: Linear Vertical as shown</p> <p>Typical Half-Power Beamwidth: 20-80 deg x 360 deg</p> <p>Typical Gain: 0-4 dB</p> <p>Bandwidth: 100% or 3:1</p> <p>Frequency Limit: Lower: 30 MHz Upper: 3 GHz</p>
<p>ALFORD LOOP</p> 	<p>Elevation:</p>  <p>Azimuth:</p> 	<p>Polarization: Linear Horizontal as shown</p> <p>Typical Half-Power Beamwidth: 80 deg x 360 deg</p> <p>Typical Gain: -1 dB</p> <p>Bandwidth: 67% or 2:1</p> <p>Frequency Limit: Lower: 100 MHz Upper: 12 GHz</p>

Figure 4

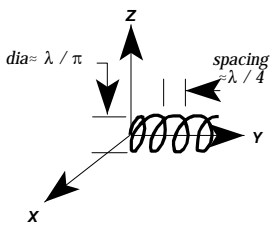


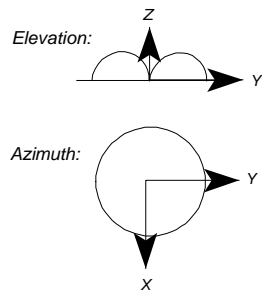
Antenna Type	Radiation Pattern	Characteristics
AXIAL MODE HELIX 		Polarization: Circular Left hand as shown Typical Half-Power Beamwidth: 50 deg x 50 deg Typical Gain: 10 dB Bandwidth: 52% or 1.7:1 Frequency Limit Lower: 100 MHz Upper: 3 GHz Remarks: Number of loops >3
NORMAL MODE HELIX 		Polarization: Circular - with an ideal pitch to diameter ratio. Typical Half-Power Beamwidth: 60 deg x 360 deg Typical Gain: 0 dB Bandwidth: 5% or 1.05:1 Frequency Limit Lower: 100 MHz Upper: 3 GHz

Figure 5





Antenna Type	Radiation Pattern	Characteristics
CAVITY BACKED SPIRAL (Flat Helix) 		Polarization: Circular Left hand as shown Typical Half-Power Beamwidth: 60 deg x 90 deg Typical Gain: 2-4 dB Bandwidth: 160% or 9:1 Frequency Limit: Lower: 500 MHz Upper: 18 GHz
CONICAL SPIRAL 		Polarization: Circular Left hand as shown Typical Half-Power Beamwidth: 60 deg x 60 deg Typical Gain: 5-8 dB Bandwidth: 120% or 4:1 Frequency Limit: Lower: 50 MHz Upper: 18 GHz

Figure 6






Antenna Type	Radiation Pattern	Characteristics
4 ARM CONICAL SPIRAL 	Elevation:  Azimuth: 	Polarization: Circular Left hand as shown Typical Half-Power Beamwidth: 50 deg x 360 deg Typical Gain: 0 dB Bandwidth: 120% or 4:1 Frequency Limit: Lower: 500 MHz Upper: 18 GHz
DUAL POLARIZED SINUOUS 	Elevation & Azimuth: 	Polarization: Dual vertical or horizontal or dual Circular right hand or left hand with hybrid Typical Half-Power Beamwidth: 75 deg x 75 deg Typical Gain: 2 dB Bandwidth: 163% or 10:1 Frequency Limit: Lower: 500 MHz Upper: 18 GHz

Figure 7



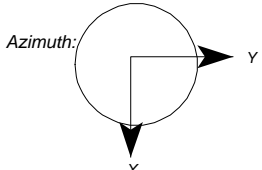


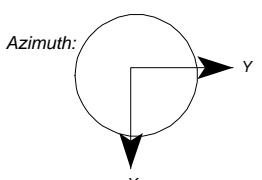
Antenna Type	Radiation Pattern	Characteristics
BICONICAL 	Elevation:  Azimuth: 	Polarization: Linear, Vertical as shown Typical Half-Power Beamwidth: 20-100 deg x 360 deg Typical Gain: 0-4 dB Bandwidth: 120% or 4:1 Frequency Limit: Lower: 500 MHz Upper: 40 GHz
BICONICAL W/POLARIZER 	Elevation:  Azimuth: 	Polarization: Circular, Direction depends on polarization Typical Half-Power Beamwidth: 20-100 deg x 360 deg Typical Gain: -3 to 1 dB Bandwidth: 100% or 3:1 Frequency Limit: Lower: 2 GHz Upper: 18 GHz

Figure 8







Antenna Type	Radiation Pattern	Characteristics
<p>HORN</p> 	<p>Elevation:</p>  <p>$3 \text{ dB beamwidth} = 56 \lambda^\circ / dz$</p> <p>Azimuth:</p>  <p>$3 \text{ dB beamwidth} = 70 \lambda^\circ / dx$</p>	<p>Polarization: Linear</p> <p>Typical Half-Power Beamwidth: 40 deg x 40 deg</p> <p>Typical Gain: 5 to 20 dB</p> <p>Bandwidth: If ridged: 120% or 4:1 If not ridged: 67% or 2:1</p> <p>Frequency Limit: Lower: 50 MHz Upper: 40 GHz</p>
<p>HORN W / POLARIZER</p> 	<p>Elevation:</p>  <p>Azimuth:</p> 	<p>Polarization: Circular, Depends on polarizer</p> <p>Typical Half-Power Beamwidth: 40 deg x 40 deg</p> <p>Typical Gain: 5 to 10 dB</p> <p>Bandwidth: 60% or 2:1</p> <p>Frequency Limit: Lower: 2 GHz Upper: 18 GHz</p>

Figure 9

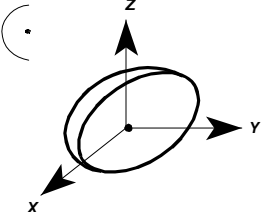

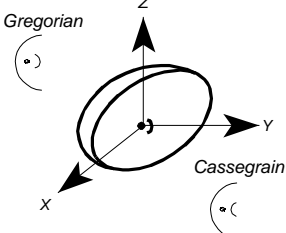

Antenna Type	Radiation Pattern	Characteristics
<p>PARABOLIC (Prime)</p> 	<p>Elevation & Azimuth</p> 	<p>Polarization: Takes polarization of feed</p> <p>Typical Half-Power Beamwidth: 1 to 10 deg</p> <p>Typical Gain: 20 to 30 dB</p> <p>Bandwidth: 33% or 1.4:1 limited mostly by feed</p> <p>Frequency Limit: Lower: 400 MHz Upper: 13+ GHz</p>
<p>PARABOLIC</p> <p>Gregorian</p>  <p>Cassegrain</p>	<p>Elevation & Azimuth</p> 	<p>Polarization: Takes polarization of feed</p> <p>Typical Half-Power Beamwidth: 1 to 10 deg</p> <p>Typical Gain: 20 to 30 dB</p> <p>Bandwidth: 33% or 1.4:1</p> <p>Frequency Limit: Lower: 400 MHz Upper: 13+ GHz</p>

Figure 10


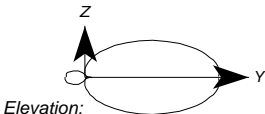
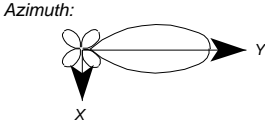

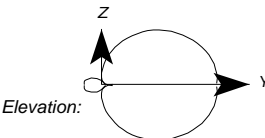

Antenna Type	Radiation Pattern	Characteristics
<p>YAGI</p> 	 <p>Elevation:</p>  <p>Azimuth:</p>	<p>Polarization: Linear Horizontal as shown</p> <p>Typical Half-Power Beamwidth: 50 deg X 50 deg</p> <p>Typical Gain: 5 to 15 dB</p> <p>Bandwidth: 5% or 1.05:1</p> <p>Frequency Limit: Lower: 50 MHz Upper: 2 GHz</p>
<p>LOG PERIODIC</p> 	 <p>Elevation:</p>  <p>Azimuth:</p>	<p>Polarization: Linear</p> <p>Typical Half-Power Beamwidth: 60 deg x 80 deg</p> <p>Typical Gain: 6 to 8 dB</p> <p>Bandwidth: 163% or 10:1</p> <p>Frequency Limit: Lower: 3 MHz Upper: 18 GHz</p> <p>Remarks: This array may be formed with many shapes including dipoles or toothed arrays.</p>

Figure 11


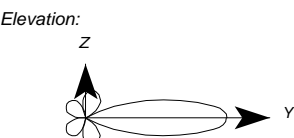
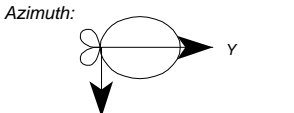


Antenna Type	Radiation Pattern	Characteristics
<p>LINEAR DIPOLE ARRAY (Corporate Feed)</p> 	<p>Elevation:</p>  <p>Azimuth:</p> 	<p>Polarization: Element dependent Vertical as shown</p> <p>Typical Half-Power Beamwidth: Related to gain</p> <p>Typical Gain: Dependent on number of elements</p> <p>Bandwidth: Narrow</p> <p>Frequency Limit: Lower: 10 MHz Upper: 10 GHz</p>
<p>APERTURE SYNTHESIS</p> 	<p>Elevation & Azimuth</p> 	<p>All characteristics dependent on elements</p> <p>Remarks: Excellent side-looking, ground mapping where the aircraft is a moving linear element.</p>

Figure 12



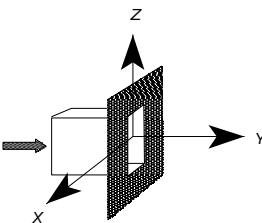


Antenna Type	Radiation Pattern	Characteristics
CAVITY BACKED CIRCUIT FED SLOT (and Microstrip Patch) 	Elevation & Azimuth 	Polarization: Linear, vertical as shown Typical Half-Power Beamwidth: 80 deg x 80 deg Typical Gain: 6 dB Bandwidth: Narrow Frequency Limit: Lower: 50 MHz Upper: 18 GHz Remarks: The feed line is sometimes separated from the radiator by a dielectric & uses capacitive coupling. Large conformal phased arrays can be made this way.
GUIDE FED SLOT 	Elevation:  Azimuth: 	Polarization: Linear, Typical Half-Power Beamwidth Elevation: 45-50° Azimuth: 80° Typical Gain: 0 dB Bandwidth: Narrow Frequency Limit: Lower: 2 GHz Upper: 40 GHz Remarks: Open RF Waveguide

Figure 13




Antenna Type	Radiation Pattern	Characteristics
CORNER REFLECTOR 	Elevation: (Z-Y) Azimuth: (X-Y) Dependent upon feed emitter	Polarization: Feed dependent Typical Half-Power Beamwidth 40 deg x variable Typical Gain: 10 dB above feed Bandwidth: Narrow Frequency Limit Lower: 1 GHz Upper: 40 GHz Remarks: Typically fed with a dipole or colinear array.
LUNEBURG LENS Also "LUNEBERG" 	Elevation & Azimuth 	Polarization: Feed dependent Typical Half-Power Beamwidth: System dependent Typical Gain: System dependent Bandwidth: Narrow Frequency Limit Lower: 1 GHz Upper: 40 GHz Remarks: Variable index dielectric sphere.

Figure 14